



# Jowat-Toptherm® 256.65




**Powerful hot melt adhesive for the bonding of trays,  
cases and folding boxes**

**Tackles very short pressing times & high restoring forces**

**Very high heat resistance**

**Wide range of adhesion for bonding  
challenging surfaces**

**Clean processing**

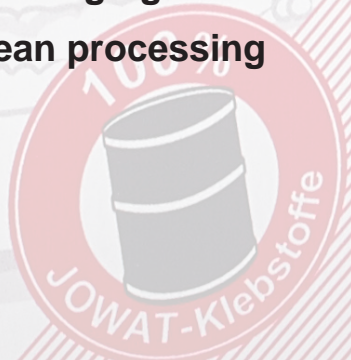

**Jowat-Toptherm® 256.65 can be used for bonding folding boxes, wrap-around cases as well as for erecting trays. The high-performance adhesive is characterized by very high heat resistance and initial strength.**

Jowat-Toptherm® 256.65 is therefore used with particular success by companies whose packaging is exposed to high temperatures. From packaging, e.g. in hot and warm filling processes, to transport, for instance in shipping containers which are not air conditioned. Jowat-Toptherm® 256.65 is, however, also used


widely in applications with low temperatures. The outstanding initial strength of this modern hot melt adhesive makes it the top choice for processes with extremely short pressing times and very high restoring forces.

In addition, Jowat-Toptherm® 256.65 impresses with excellent oxidation stability and colorfastness in the melt plus a broad spectrum of adhesion, also to challenging surfaces. Therefore, Jowat-Toptherm® 256.65 can be used in a wide range of applications.

## Jowat-Toptherm® 256.65

Powerful hot melt adhesive for the bonding of trays, cases and folding boxes.

Short pressing time & high restoring forces	● ● ●
Clean processing	● ● ○
Demanding surfaces	● ● ○
Heat resistance	● ● ●
Cold resistance	● ● ○
Environmental benefits	● ● ○
Food safety	EU 10/2011 FDA 175.105

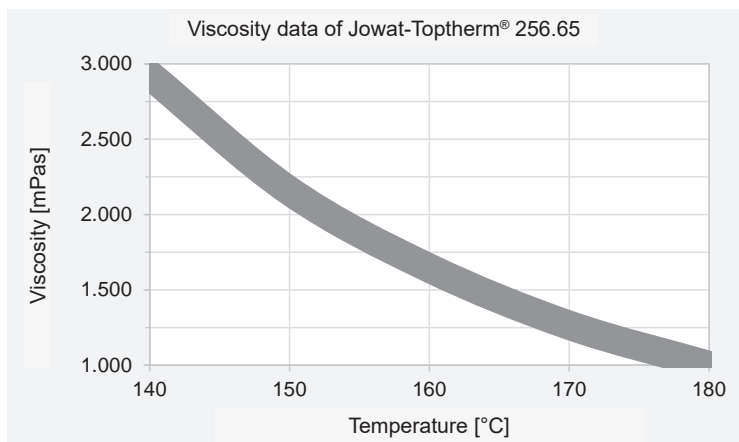

The information given in this leaflet is based on test results from our laboratories as well as on experience gained in the field, and does in no way constitute any guarantee of properties. Due to the wide range of different applications, substrates, and processing methods beyond our control, no liability may be derived from these indications nor from the information provided by our free technical advisory service. Before processing, please request the corresponding data sheet and observe the information in it! Customer trials under everyday conditions, testing for suitability at normal processing conditions, and appropriate fit-for-purpose testing are absolutely necessary. For the specifications as well as further information, please refer to the latest technical data sheets.