




Jowat
GREEN ADHESIVES

Jowatherm-Reaktant® 608.00

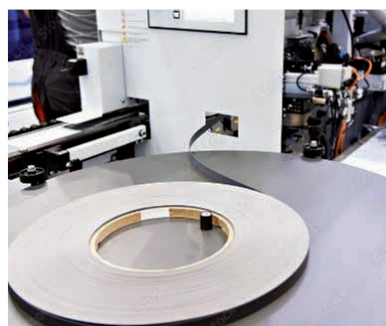

Unfilled PUR hot melt adhesive for edgebanding

- Facilitates thin, colorless bondlines of superior quality
- Low energy consumption due to low processing temperature
- No stringing; for accurate adhesive application



State of the Art in Premium Edgebanding

When highest quality in edgebanding is required, **Jowatherm-Reaktant® 608.00** is the ultimate benchmark. This powerful PUR hot melt adhesive has been developed by Jowat with the expertise drawn from many decades of experience in edgebanding applications. Processors benefit from the extremely thin bondlines, a wide range of adhesion to different materials, excellent thermal stability and high initial strength. In addition, the high yield facilitates finest joint qualities with minimal application amounts. Choose **Jowatherm-Reaktant® 608.00** and do not compromise on the quality of your furniture.

Jowatherm-Reaktant® 608.00/01

Unfilled PUR hot melt adhesive for edgebanding

Based on	PUR
Appearance	colorless, white
processing temperature	100°C–120°C
Crosslinking speed	●●○
Heat resistance	●●●
Water resistance	●●●
Feed speed	●●○
Yield	●●●

The information given in this leaflet is based on test results from our laboratories as well as on experience gained in the field, and does in no way constitute any guarantee of properties. Due to the wide range of different applications, substrates, and processing methods beyond our control, no liability may be derived from these indications nor from the information provided by our free technical advisory service. Before processing, please request the corresponding data sheet and observe the information in it! Customer trials under everyday conditions, testing for suitability at normal processing conditions, and appropriate fit-for-purpose testing are absolutely necessary. For the specifications as well as further information, please refer to the latest technical data sheets.