




Jowatherm-Reaktant® 607.10



Fast-crosslinking PUR edgebanding adhesive
For challenging ambient conditions
Economical processes due to high initial strength
Good bonding strengths and broad spectrum of adhesion

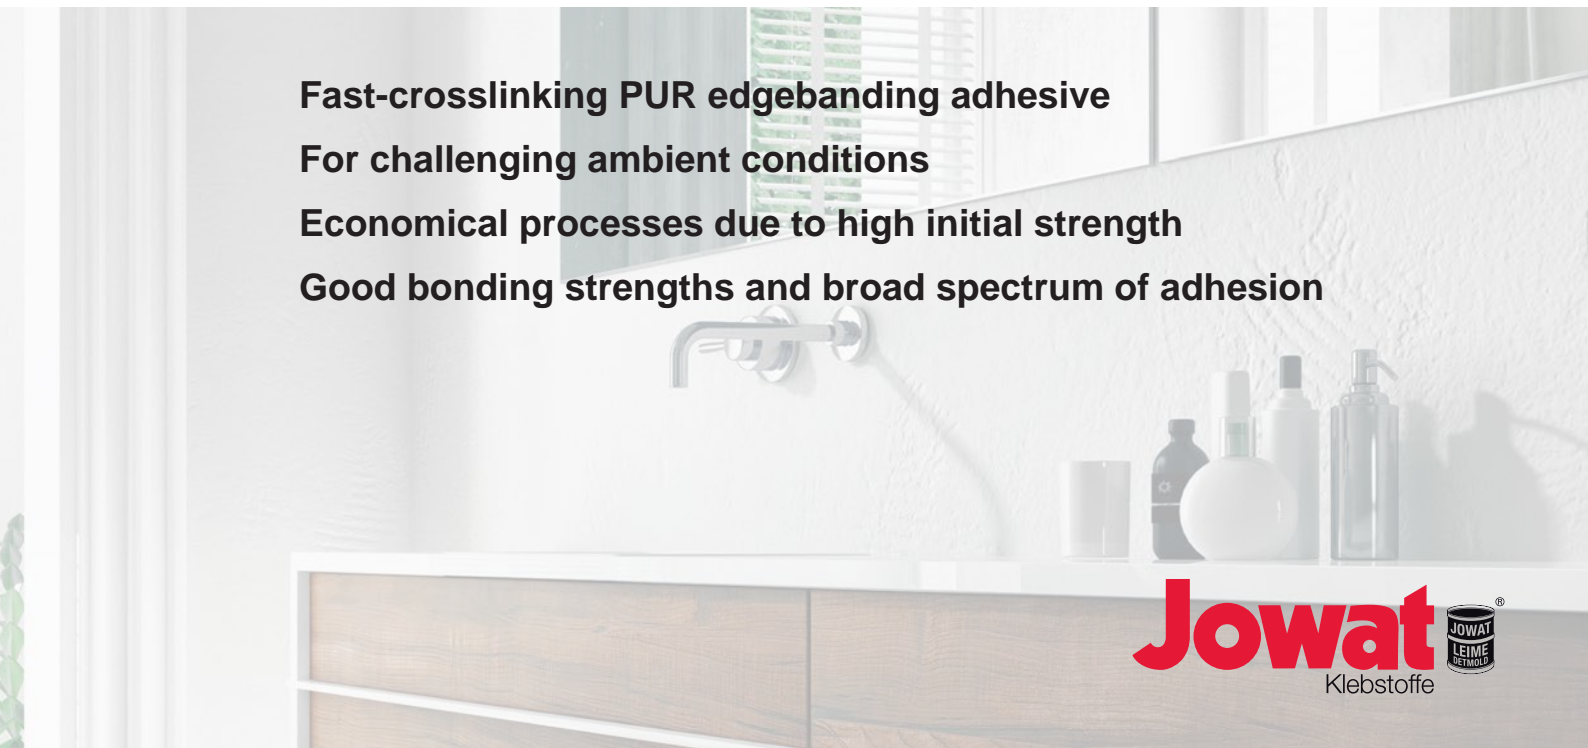

Jowatherm-Reaktant® 607.10 is an edgebanding adhesive that has been developed with a special focus on fast cross-linking reactions. The special formulation facilitates downstream processes after a short time and therefore supports optimised manufacturing procedures.

Jowatherm-Reaktant® 607.10 impresses also under difficult conditions and can be a problem-solver, for instance during the cold seasons, when the processing of PUR adhesives is made more difficult by low humidity. The broad spectrum of adhesion facilitates the bonding of established edgebanding materials and good initial strength ensures a clean finishing.


Jowatherm-Reaktant® 607.10 is also available in a white colour version under the product name **Jowatherm-Reaktant® 607.11**.



Jowatherm-Reaktant® 607.10

For automatic edgebanders. Wide range of applications possible, e.g. for PVC, ABS, PP, resinated paper and veneer edgebands.

Polymer base		PUR
Processing temperature	[°C]	130 – 150
Desity	[g/cm³]	approx. 1.3
Viscosity at 140 °C	[mPas]	approx. 100,000
Softening range	[°C]	approx. 95 (Kofler bench)
Appearance		beige, white

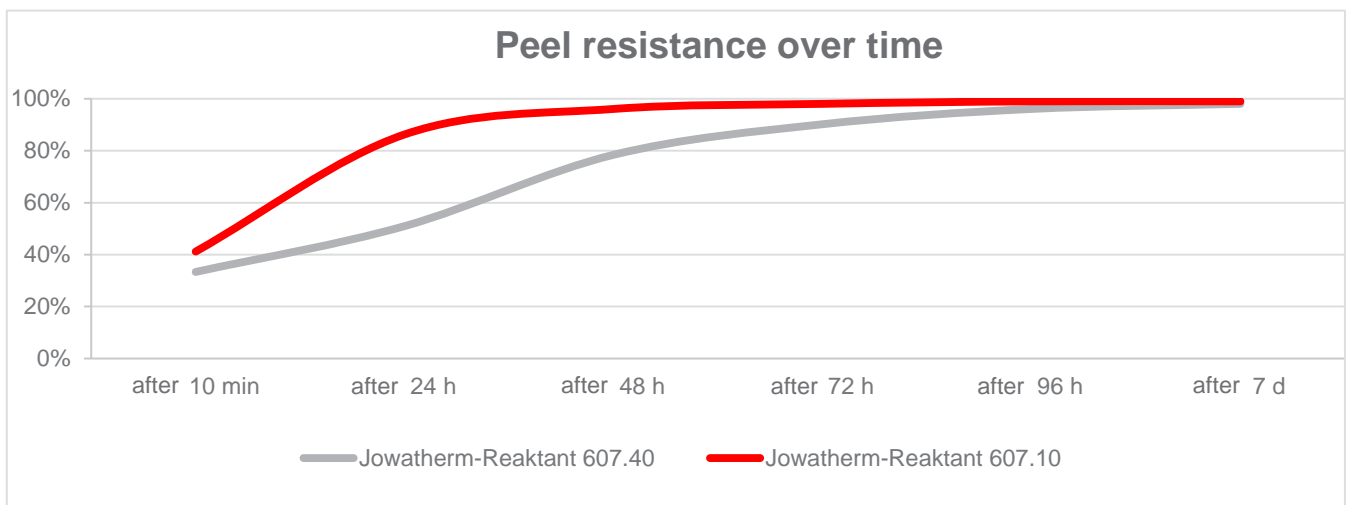

The information given in this leaflet is based on test results from our laboratories as well as on experience gained in the field, and does in no way constitute any guarantee of properties. Due to the wide range of different applications, substrates, and processing methods beyond our control, no liability may be derived from these indications nor from the information provided by our free technical advisory service. Before processing, please request the corresponding data sheet and observe the information in it! Customer trials under everyday conditions, testing for suitability at normal processing conditions, and appropriate fit-for-purpose testing are absolutely necessary. For the specifications as well as further information, please refer to the latest technical data sheets.