

New product labelling

- Higher transparency regarding the shelf life of the adhesives
- Best-before date (BBD) information printed on all product labels, facilitating optimised storage and order management



Best-before date
Product label colour

News regarding product labelling at Jowat



Best-before date (BBD)

Starting from 01.01.2016, the best-before date (BBD) will be printed as a standard information on all product labels of the Jowat Group.

Due to this harmonised layout of the labels, Jowat increases the transparency regarding the shelf life of products considerably. The inconvenient calculation of the actual expiration date depending on the “date of delivery ex production site” becomes obsolete.

The best-before date provides optimised storage and order management for all employees involved in the commercial and logistic processes.

The change will come with a transition period in which products with both types of labels will be delivered (with and without best before dates) until all goods that were manufactured before 01.01.2016 are sold. Of course, the changed product labels will not affect the high quality of the delivered Jowat adhesives.

In individual cases where Jowat adhesives should be shortly before or past their best-before date due to customer-specific production cycles or changing internal demand, we are providing the service of a qualified extension of the best-before date of the concerned adhesives.

For questions and further details, please contact your Jowat sales representative.



Label with best-before date printed on it

New colour on labels and product documentation

In 2016, the colour on all labels and product documentations in the Jowat Group will be changed to a standardised red within the framework of a harmonisation of the global market communication. The colour distinction (red, orange, blue) between individual product groups / adhesive technologies known from the past will become obsolete.

A transition period in which both versions of the labels and product documentations are in use until all documents are updated to the new design must be taken into consideration.

Current colour of the technical data sheets:

Jowat®

2-Component SE Polymer flexible, non-ageing 2-component adhesive

690.00

Application: For flexible bonding of plastics, metals and caoutchouc materials, also for sealing seams and as casting compound. Preliminary customer testing is absolutely necessary.

Basic: Hybrid system of epoxy and silane resins.

Characteristical/Directions for Use: Paste compound which flows and spreads well. Application to one of the substrates, then to both substrates for approx. 2 h at RT, increasing the temperature will reduce the curing time. Curing is bubble-free, no reaction shrinkage. After approx. 24 h, 50 % of the final strength will already be achieved. Complete cure within 1 week at RT, independent of the adhesive application thickness.

The surfaces to be bonded have to be clean, dry and grease-free. Application is carried out using a 2-component cartridge with a static mixer (at least 18 to 24 elements). A suitable type of gun would be a sequential patch type for cartridges, which can be operated manually or by electronic controls. We do not recommend using guns operating with compressed air, since the air jet exerts uncontrolled pressure on both chambers, and this may prevent a homogeneous mixing result. Larger quantities can also be mixed homogeneously in a clean container and then applied with a toothed spatula within the pot life.

Technical Data:

	Component A	Component B
Colour:	690.01 white	690.02 black
Density [g/cm³]:	approx. 1.12	approx. 1.28
Solid content [%]:	approx. 100	approx. 100
Mixing ratio (by volume):	2	1
Mixing ratio (by weight):	100	57
Viscosity [mPa·s]:	approx. 50,000	approx. 25 - 30
Processing time [minutes]:	approx. 25 - 30	blackish-gray
Appearance:		

Thinner: May not be thinned.

Jowat® CAP

250.00

Jowacoll® EPI

102.49

Application: For flexible bonding of plastics, metals and caoutchouc materials, also for sealing seams and as casting compound. Preliminary customer testing is absolutely necessary.

Basic: Hybrid system of epoxy and silane resins.

Characteristical/Directions for Use: Paste compound which flows and spreads well. Application to one of the substrates, then to both substrates for approx. 2 h at RT, increasing the temperature will reduce the curing time. Curing is bubble-free, no reaction shrinkage. After approx. 24 h, 50 % of the final strength will already be achieved. Complete cure within 1 week at RT, independent of the adhesive application thickness.

The surfaces to be bonded have to be clean, dry and grease-free. Application is carried out using a 2-component cartridge with a static mixer (at least 18 to 24 elements). A suitable type of gun would be a sequential patch type for cartridges, which can be operated manually or by electronic controls. We do not recommend using guns operating with compressed air, since the air jet exerts uncontrolled pressure on both chambers, and this may prevent a homogeneous mixing result. Larger quantities can also be mixed homogeneously in a clean container and then applied with a toothed spatula within the pot life.

Technical Data:

	Component A	Component B
Colour:	690.01 white	690.02 black
Density [g/cm³]:	approx. 1.12	approx. 1.28
Solid content [%]:	approx. 100	approx. 100
Mixing ratio (by volume):	2	1
Mixing ratio (by weight):	100	57
Viscosity [mPa·s]:	approx. 50,000	approx. 25 - 30
Processing time [minutes]:	approx. 25 - 30	blackish-gray
Appearance:		

Thinner: May not be thinned.



Future colour of the technical data sheets:

Jowat®

2-Component SE Polymer flexible, non-ageing 2-component adhesive

690.00

Application: For flexible bonding of plastics, metals and caoutchouc materials, also for sealing seams and as casting compound. Preliminary customer testing is absolutely necessary.

Basic: Hybrid system of epoxy and silane resins.

Characteristical/Directions for Use: Paste compound which flows and spreads well. Application to one of the substrates, then to both substrates for approx. 2 h at RT, increasing the temperature will reduce the curing time. Curing is bubble-free, no reaction shrinkage. After approx. 24 h, 50 % of the final strength will already be achieved. Complete cure within 1 week at RT, independent of the adhesive application thickness.

The surfaces to be bonded have to be clean, dry and grease-free. Application is carried out using a 2-component cartridge with a static mixer (at least 18 to 24 elements). A suitable type of gun would be a sequential patch type for cartridges, which can be operated manually or by electronic controls. We do not recommend using guns operating with compressed air, since the air jet exerts uncontrolled pressure on both chambers, and this may prevent a homogeneous mixing result. Larger quantities can also be mixed homogeneously in a clean container and then applied with a toothed spatula within the pot life.

Technical Data:

	Component A	Component B
Colour:	690.01 white	690.02 black
Density [g/cm³]:	approx. 1.12	approx. 1.28
Solid content [%]:	approx. 100	approx. 100
Mixing ratio (by volume):	2	1
Mixing ratio (by weight):	100	57
Viscosity [mPa·s]:	approx. 50,000	approx. 25 - 30
Processing time [minutes]:	approx. 25 - 30	blackish-gray
Appearance:		

Thinner: May not be thinned.

Jowat® CAP

250.00

Jowacoll® EPI

102.49

Application: For flexible bonding of plastics, metals and caoutchouc materials, also for sealing seams and as casting compound. Preliminary customer testing is absolutely necessary.

Basic: Hybrid system of epoxy and silane resins.

Characteristical/Directions for Use: Paste compound which flows and spreads well. Application to one of the substrates, then to both substrates for approx. 2 h at RT, increasing the temperature will reduce the curing time. Curing is bubble-free, no reaction shrinkage. After approx. 24 h, 50 % of the final strength will already be achieved. Complete cure within 1 week at RT, independent of the adhesive application thickness.

The surfaces to be bonded have to be clean, dry and grease-free. Application is carried out using a 2-component cartridge with a static mixer (at least 18 to 24 elements). A suitable type of gun would be a sequential patch type for cartridges, which can be operated manually or by electronic controls. We do not recommend using guns operating with compressed air, since the air jet exerts uncontrolled pressure on both chambers, and this may prevent a homogeneous mixing result. Larger quantities can also be mixed homogeneously in a clean container and then applied with a toothed spatula within the pot life.

Technical Data:



	Component A	Component B
Colour:	690.01 white	690.02 black
Density [g/cm³]:	approx. 1.12	approx. 1.28
Solid content [%]:	approx. 100	approx. 100
Mixing ratio (by volume):	2	1
Mixing ratio (by weight):	100	57
Viscosity [mPa·s]:	approx. 50,000	approx. 25 - 30
Processing time [minutes]:	approx. 25 - 30	blackish-gray
Appearance:		

Thinner: May not be thinned.

Compared:
old (left) and new (right):



Jowat | Ihr Partner in Sachen Kleben
Jowat | Your Partner in bonding

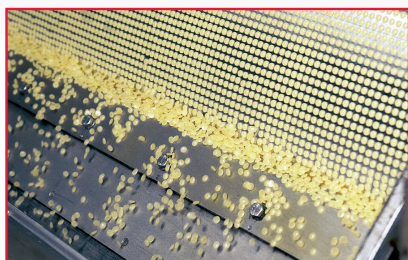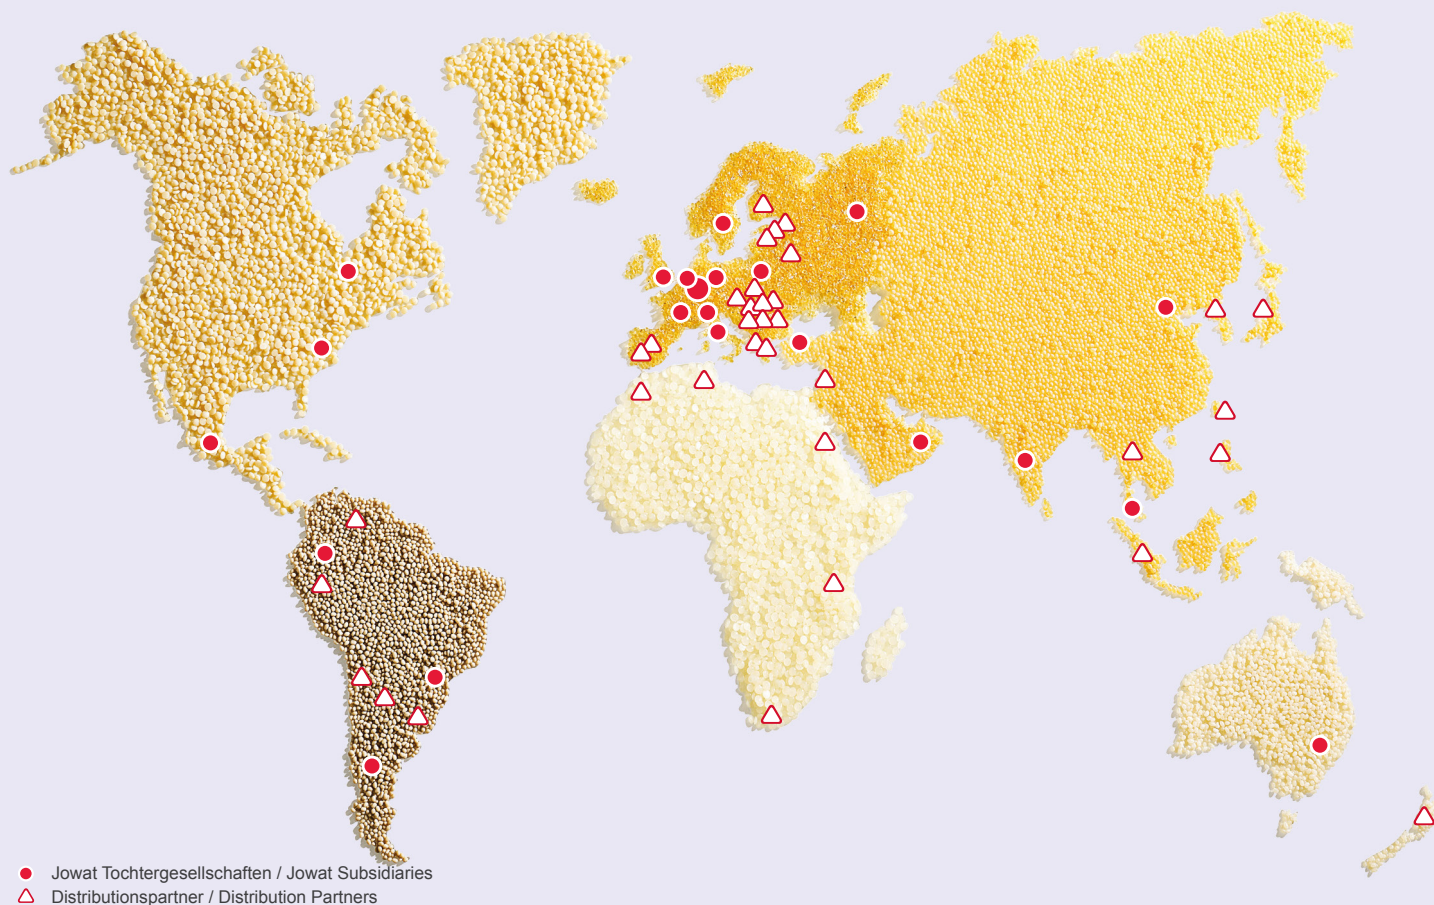

Jowat – Kleben erster Klasse
Jowat – first class bonding

Jowat 
Klebstoffe

Jowat SE
Ernst-Hilker-Straße 10-14
32758 Detmold
Telefon +49 (0)5231 749-0
Telefax +49 (0)5231 749-105
info@jowat.de · www.jowat.de

Australia Brasil Canada Chile 中国 Colombia Deutschland France भारत गणराज्य Italia Malaysia Mexico
Nederland Polska Россия Sverige Suisse Türkiye United Kingdom United States of America قدحتمل اتيبرعل تاراملإا